
Pods & Booths

Product Comparison



Spacestor.

Single User Pods & Booths

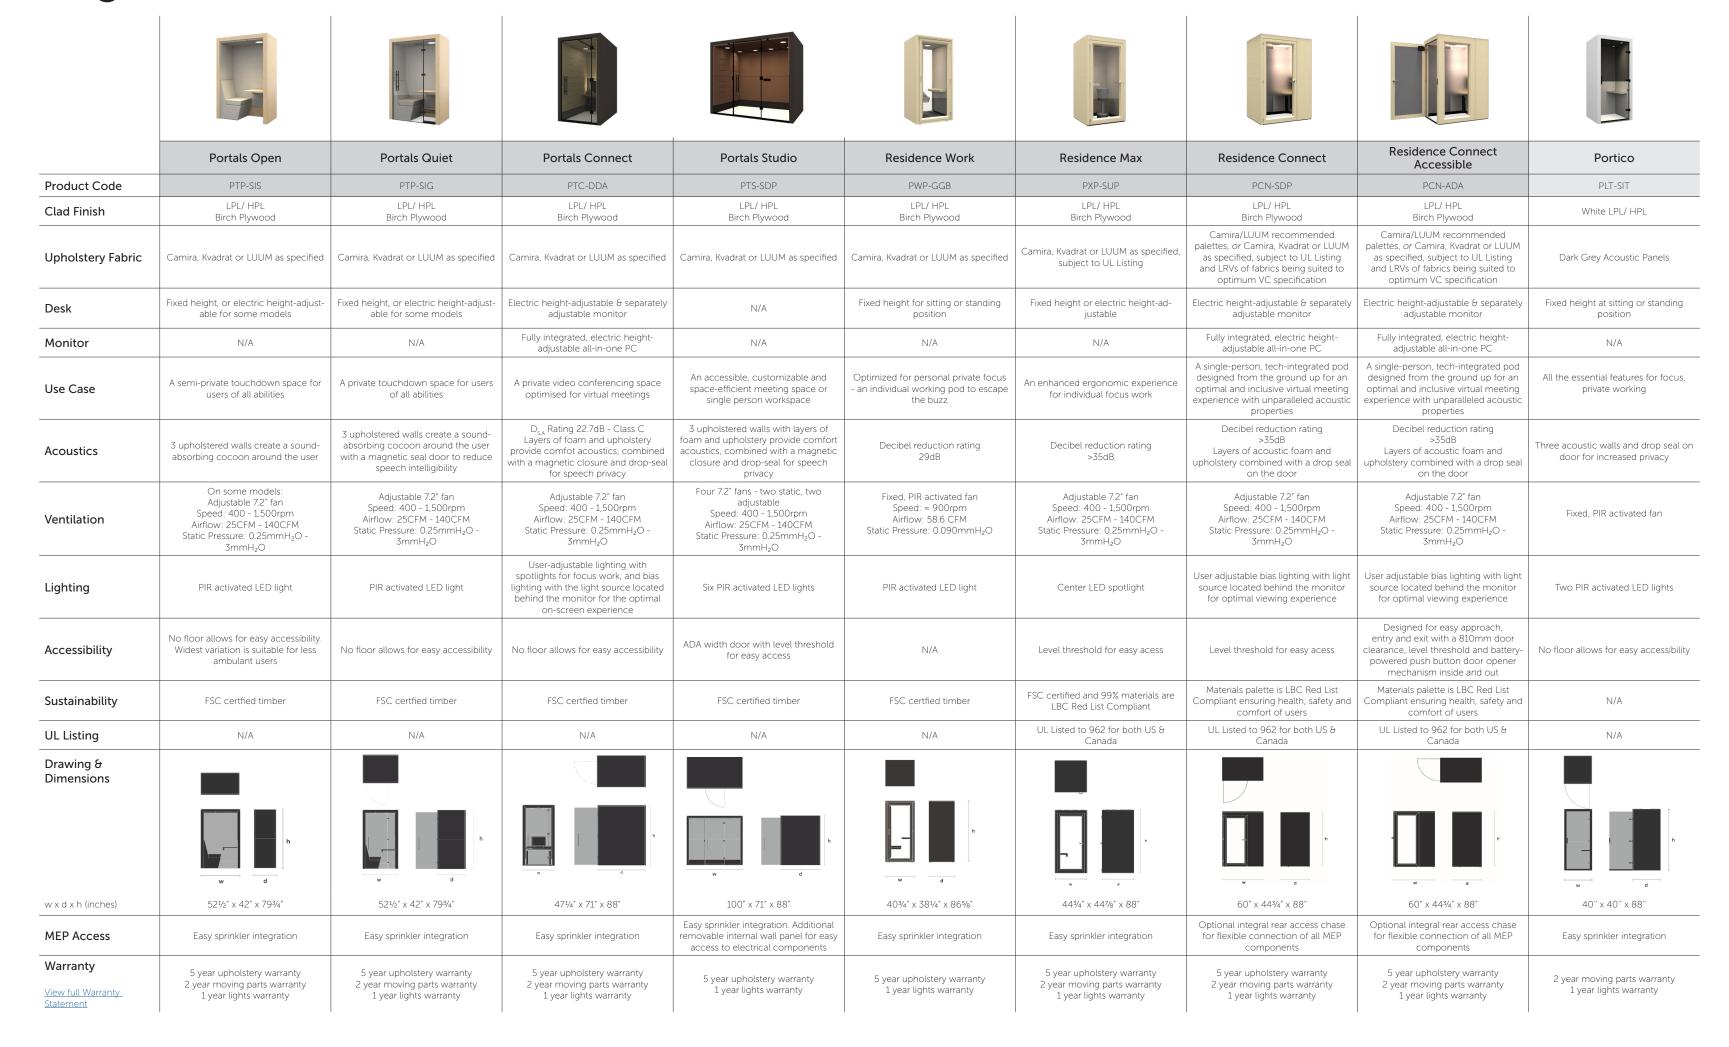

Collaborative Pods & Booths

	Railway Carriage	Portals Huddle	Portals Room	Residence Meet	Residence Huddle
Product Code	RYP-FAB	PTH-2PS	PTR-SDP	PMP-GGB	PHP-GGB
Clad Finish	LPL/ HPL Birch Plywood	LPL/ HPL Birch Plywood	LPL/ HPL Birch Plywood	LPL/ HPL Birch Plywood	LPL/ HPL Birch Plywood
Upholstery Fabric	Camira, Kvadrat or LUUM as specified	Camira, Kvadrat or LUUM as specified	Camira, Kvadrat or LUUM as specified	Camira, Kvadrat or LUUM as specified	Camira, Kvadrat or LUUM as specified
Desk	Fixed table with pole leg and additional disc base option	Fixed height at sitting position	N/A	Fixed height for sitting position or no desk	Fixed height for sitting position
Monitor	Option to add HD display monitor to back of booth	Option to add HD display monitor to back of booth	Integrated multi-fit screen bracket, customer supplies screen	N/A	N/A
Use Case	Optimized for collaborative in-person meetings of 2-6 people	Optimized for private collaborative in- person meetings of 2-4 people	A highly customizable, plug-and-play meeting space or single person office	Optimized for private 1-2-1 meetings, face-to-face	Optimized for private meetings, of two to four people face-to-face
Acoustics	3 upholstered walls create a sound- absorbing cocoon around the users	3 upholstered walls create a sound- absorbing cocoon around the users with a magnetic seal door with drop seal to reduce speech intelligibility	3 upholstered walls with layers of foam and upholstery provide comfort acoustics, combined with a magnetic closure and drop-seal for speech privacy	Decibel reduction rating 29dB	Decibel reduction rating 29dB
Ventilation	N/A	Adjustable: 3 x 7.2" fans Max Speed: 1500rpm Max Airflow: 140CFM	Adjustable: 6 x 7.2" fans Max Speed: 400 - 1,500rpm Max Airflow: 25CFM - 140CFM Static Pressure: 0.25mmH ₂ O - 3mmH ₂ O	Fixed, PIR activated fan Speed: ≈ 900rpm Airflow: 58.6 CFM Static Pressure: 0.090mmH₂O	Fixed, PIR activated fan Speed: ≈ 900rpm Airflow: 58.6 CFM Static Pressure: 0.090mmH₂O
Lighting	3 PIR activated lighting options: LED spotlight, strip lights, pendant	PIR activated spotlight	PIR activated spotlights	PIR activated LED light	PIR activated LED light
Accessibility	Optional to join extended table lengths allow for less ambulant users joining a meeting in a Railway Carriage	No floor allows for easy accessibility	ADA Door-width opening with level threshold for easy access	N/A	N/A
Sustainability	FSC certfied timber	FSC certfied timber	FSC certfied timber	FSC certfied timber	FSC certfied timber
UL Listing	N/A	N/A	N/A	N/A	N/A
Drawing & Dimensions				h	h
	w d		w d	w d	
w x d x h (inches)	81" x 53¾" x 79¾"	81" x 42½ x 88"	109" x 100" x 88"	79" x 38 ¹ / ₄ " x 86 ⁵ / ₈ "	79" x 71" x 85"
MEP Access	Easy sprinkler integration	Easy sprinkler integration	Easy sprinkler integration. Additional removable internal wall panel for easy access to electrical components	Easy sprinkler integration	Easy sprinkler integration
Warranty View full Warranty Statement	5 year upholstery warranty 1 year lights warranty	5 year upholstery warranty 1 year lights warranty	5 year upholstery warranty 1 year lights warranty	5 year upholstery warranty 1 year lights warranty	w5 year upholstery warranty 1 year lights warranty

